

PHONOLYT® Leidingvastpunten

Single set, galvanized

Application

- The ideal building block for sound-coupled fixed cable fastenings for sound insulation requirements **according to DIN 4109 and VDI 4100**
- Ideal for the fastening of cables to wall, ceiling and floor
- Fastening of cables and channels for mounting on the floor
- Suitable as sound-coupled cable fastening for cable runs

Your advantages

- Separates the cable acoustically from the building body and reduces the contact noise to a maximum of 40 dB(A)
- The thought-through construction simplifies the installation
- Functional construction for 2-point fastening of the cable
- Extra special feature: **also approved for alternating load directions in cable runs**
- Gapless adjustable wall distance
- Free of silicones




Single set dB(A) 27, consisting of:

- 1 PHONOLYT® dB(A) 27, M10
- 2 screw clamps, 30 x 3 mm, without insert strip, heavy-duty, M10, galvanized
- 2 cable ends M10
- 4 corner bolts M10

Single set dB(A) 40, consisting of:

- 1 PHONOLYT® dB(A) 40, M12
- 2 screw clamps, 30 x 3 mm, without insert strip, heavy-duty, M12, galvanized
- 2 cable ends M12
- 4 corner bolts M12

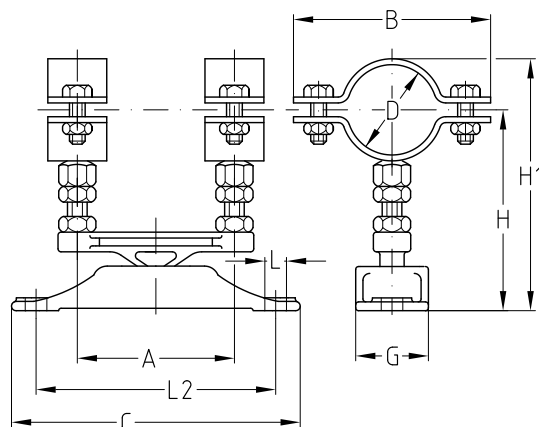

The data



Type	Size		Clamp range [mm]	Cable end [mm]	Article no.	Verp. unit	Unit	Dimensions [mm]							
	[Inch]	[mm]						A	B	C	G	H	H1	Ø L	L2
dB(A) 27	3/8		14-18	M10 x 35	120348	1	piece	80	66	147	37	81	92	11	122
	1/2		20-22		120340				71			84	97		
	3/4		25-28		120344				74			87	104		
	1		31-35		120308				83			90	110		
	1 1/4		40-43	M10 x 55	120304				92			94	119		
	1 1/2		48-52		120316				100			99	128		
		57	53-57		120332				105			120	150		
dB(A) 40	1		31-35	M12 x 50	120312			126	83	227	60	123	143	13	194
	1 1/4		40-43		120324				92			127	151		
	1 1/2		48-52		120320				100			132	161		
		57	53-57		120336				105			135	165		
	2		58-61		120328				110			137	170		



See the main section "Technical information" for the allowable load values.